

TVLI SERIES-Lithium LiFePO4 Battery

TVLI12-200 (12.8V200Ah)

This model of battery adopts the best value LiFePO4 cells, with the smart BMS system. IP65 protection, support series and parallel use, is an ideal choice for outdoor, energy storage, marine and other fields.

Features


- . Safest Lithium Battery Technology
- . Lighter Weight
- . Eco-friendly
- . Longer Life
- . Multiple Safety Protection
- . Intelligent Balancing Function
- . 20 Years Designed Service Life


Performance



Cell	Square LFP 100Ah	Rated Charge Current	100A	Rated Discharge Current	100A
Terminal	M8	Max. Charge Current 200A Max. Discharge Current		200A	
IP Grade	IP65	Rated Charge Voltage 13.6~13.8		Rated Discharge Cut-off Voltage	11.2V
Self Discharge	<=2%/ Month	Charge Cut-off Voltage 14.6V		Min. Discharge Cut-off Voltage	>10V
Cycle Life	e Life 3000times(100% DOD.1C/1C) Balancing Voltage		>13.6V	Short Circuit Current	Approx.1800A

Size

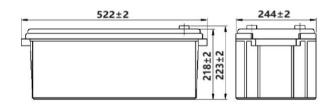





Main Parameters

y 200Ah (0.5C@25°C)	200Ah (0.5C@25°C)			
oltage 12.8V				
/ 2560Wh	2560Wh			
t 18.5kg	18.5kg			
ons 522*244*223 mm	522*244*223 mm			
l <10mΩ	<10mΩ			
emp -5°C to 35°C	-5°C to 35°C			
Temp -20°C to 60°C	-20°C to 60°C			
emp 0°C to 45°C	0°C to 45°C			
th YES				
Cell CE/UN38.3/	UL19			
Battery CE/UN38.3. 2619	/IEC6			
al UN3480, CLASS 9				
$ \begin{array}{c c} <& <10m\Omega \\ \hline ce & <10m\Omega \\ \hline ce & \\ \hline femp & -5^\circ C \ to \ 35^\circ C \\ \hline ce & \\ \hline femp & 0^\circ C \ to \ 45^\circ C \\ \hline ce & \\ \hline ce & \\ \hline fem & \\ \hline 0^\circ C \ to \ 45^\circ C \\ \hline ce & \\ ce & \\ \hline ce & \\ ce & \\ \hline ce & \\ ce & \\$.3, 9			

www.cnthinkvolt.com

Suzhou ThinkVolt New Energy Co.,Ltd



TVLI SERIES-Lithium LiFePO4 Battery

TVLI12-200 (12.8V200Ah)


Constant Current Discharge Data (Amperes @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.8V)	200A	100A	66.6A	50A	40A	20A	10A

Constant Power Discharge Data (Watts @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.8V)	2560W	1280W	852W	640W	512W	256W	128W

Characteristics Curve

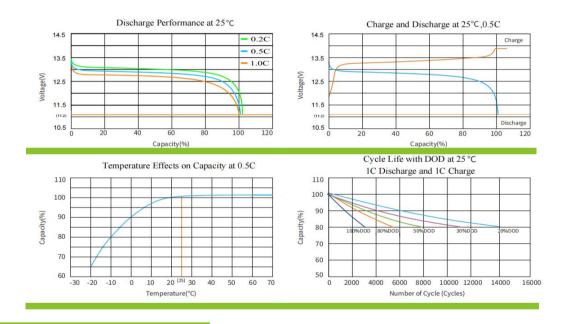

Cautious

- 1. Do NOT short circuit, crush or disassemble. Do NOT heat or incinerate. Do NOT immerse in any liquid.
- 2. Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.
- 3. Disconnect charging source prior to connecting or disconnecting battery terminals.
- 4. Do not dispose of batteries in a fire as they can explode.
- 5. Do not open, alter, or mutilate batteries. Released electrolyte is harmful to skin and eyes. It may be toxic.
- 6. Do not mix different types and brands of lithium-ion batteries.
- 7. Do not dispose in trash, follow local regulations and manufacturer's instruction.
- 8. See installation instructions before connecting to the supply.
- 9. The battery cabinet receives power from more than one source. Disconnection of all DC sources is required to De-energize this unit before installing or servicing. Wait 5 minutes before opening the unit.
- 10. Do not install on or over combustible surfaces.
- 11. Refer to manual before servicing.
- 12. Do not touch bare terminals.

www.cnthinkvolt.com